

### **ROPA 30 Water and Wastewater Servicing Included in the Current Master Plan**

a) ROPA 30 Water Servicing Included in the Current Master Plan

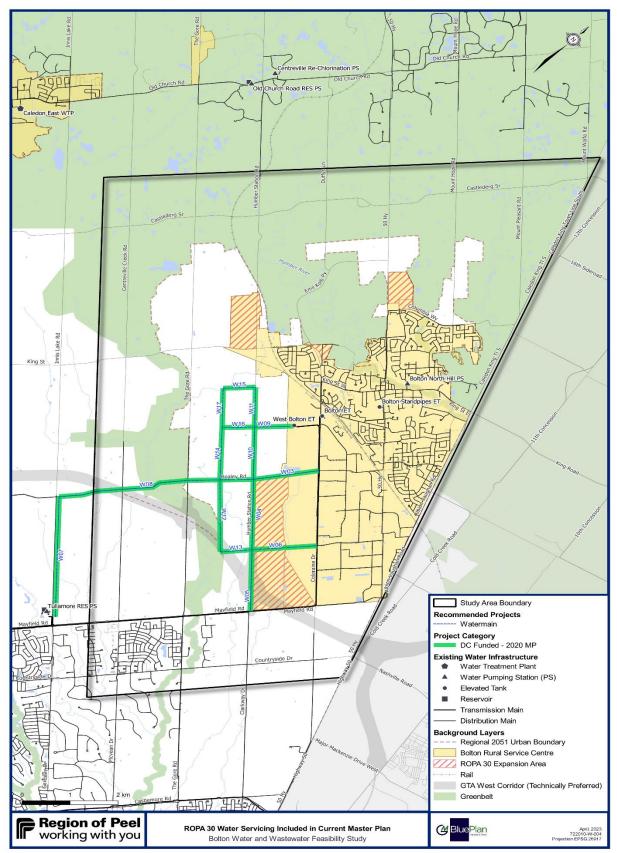

#### **ROPA 30 Water and Wastewater Servicing Included in the Current Master Plan**

#### b) ROPA 30 Wastewater Servicing Included in the Current Master Plan

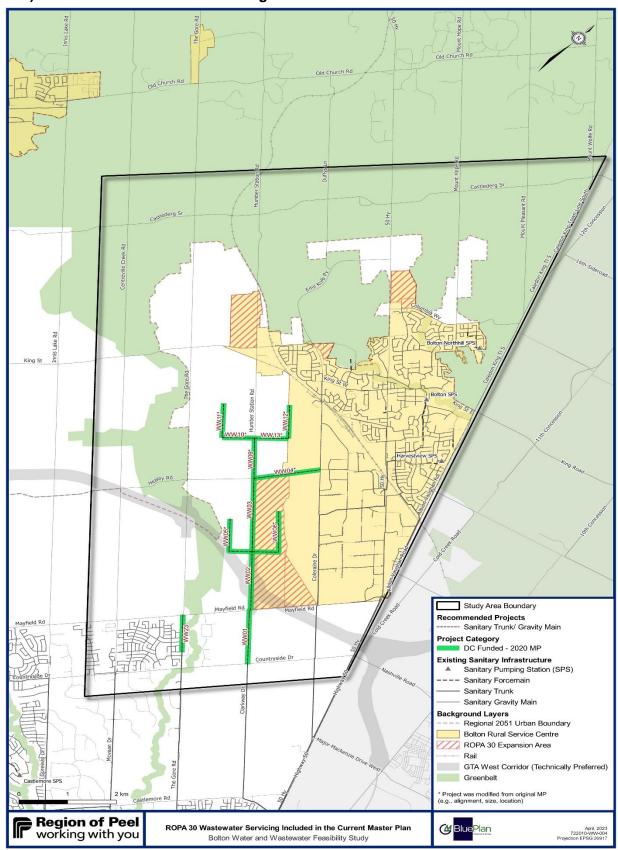

## **ROPA 30 Water and Wastewater Servicing Included in the Current Master Plan**

Table 1. Summary of Projects Included in Current Master Plan to Service ROPA 30

| Label on<br>Map | Project Name  | Estimated In<br>Service Year | Dependency                        | Option |
|-----------------|---|------------------------------|-----------------------------------|--------|
| W03             | Z6 600-mm sub-transmission main on Healy Road from Humber Station Road to Coleraine Drive                                       | 2025                         | Independent/ align with WW4       | n/a    |
| W04             | Z6 400-mm water main on Humber<br>Station Road from a future street<br>north of Mayfield Road to Healey<br>Road                 | 2025                         | Currently underway                | 6      |
| W05             | Z6 400-mm water main on Humber<br>Station Road from Mayfield Road to<br>1450m northerly   | 2025                         | Currently Underway                | 6      |
| W06             | Z6 400-mm water main on a <b>future street</b> north of Mayfield Road from Humber Station Road to Coleraine Drive               | 2026                         | Road construction                 | 6      |
| W07             | Z6 750-mm sub-transmission main on Innis Lake Road from the Tullamore Pumping Station to Healey Road                            | 2031                         | Independent                       | n/a    |
| W08             | Z6 600-mm sub-transmission main on Healy Road from Innis Lake Road to Humber Station Road                                       | 2031                         | Independent                       | n/a    |
| W09             | Z6 400-mm water main on a <b>future street</b> north of Healey Road from West Bolton Elevated Tank to Humber Station Road       | 2031                         | Road construction                 | 6      |
| W10             | Z6 400-mm water main on Humber<br>Station Road from Healey Road to<br>a future street northerly                                 | 2031                         | Independent/ align with WW09      | 6      |
| W11             | Z6 400-mm water main on Humber<br>Station Road from a future street<br>north of Healey Road to<br>approximately 1200m northerly | 2031                         | Independent/ W10                  | n/a    |
| W12             | Z6 400-mm water main on a future street from Healy Road to approximately 1680m southerly, east of Humber Station Road           | 2032                         | Road / development driven         | n/a    |
| W13             | Z6 400-mm water main on a future street from Humber Station Road to 660m westerly   | 2032                         | Road / development driven         | n/a    |
| W14             | Z6 400-mm water main on a future street from Healey Road to 1220m northerly, west of Humber Station Road                        | 2036                         | Road / development<br>driven/ W08 | n/a    |
| W15             | Z6 400-mm water main on a future street from Humber Station Road to 680m westerly, south of King Street                         | 2036                         | Road / development driven         | n/a    |
| W16             | Z6 400-mm water main on a future street from Humber Station Road to 680m westerly   | 2036                         | Road / development driven         | n/a    |

# Appendix II Bolton Water and Wastewater Servicing Strategy

**ROPA 30 Water and Wastewater Servicing Included in the Current Master Plan** 

| Label on<br>Map | Project Name   | Estimated In Service Year | Dependency                 | Option |
|-----------------|--|---------------------------|----------------------------|--------|
| W17             | Z6 400-mm water main on a future street from future street north of Healey Road to 910m northerly, west of Humber Station Road | 2036                      | Road / development driven  | n/a    |
| WW01            | 750-mm sanitary sewer on<br>Clarkway Drive from Countryside<br>Drive to Mayfield Road  | 2025                      | Currently underway         | 6      |
| WW02            | 750-mm sanitary trunk sewer on<br>Humber Station Rd from Mayfield<br>Road to 1600m northerly                                   | 2025                      | Currently underway         | 6      |
| WW03            | 750-mm sanitary trunk sewer on<br>Humber Station Rd from Healey Rd<br>to 1500m southerly                                       | 2025                      | Currently underway         | 6      |
| WW04            | 450-mm sanitary sewer on Healey<br>Road from Coleraine Drive to<br>Humber Station Road   | 2025                      | Independent/ align with W3 | n/a    |
| WW05            | 450-mm sanitary sewer on a future street from Humber Station Road to 750m north-westerly                                       | 2027                      | Road / development driven  | n/a    |
| WW06            | 450-mm sanitary sewer on a future street from Humber Station Road to 960m north easterly                                       | 2027                      | Road / development driven  | 6      |
| WW09            | 525-mm sanitary sewer on Humber<br>Station Road from Healey Road to<br>King Street   | 2031                      | Independent                | n/a    |
| WW10            | 450-mm sanitary sewer on a future street from Humber Station Road to 670 meters westerly                                       | 2036                      | Road / development driven  | n/a    |
| WW11            | 375-mm sanitary sewer on a future street from a future street 890m north of Healey Road to 800m northerly                      | 2036                      | Road / development driven  | n/a    |
| WW12            | 375-mm sanitary sewer on a future street from a future street east of Humber Station Road to 780m northerly                    | 2032                      | Road / development driven  | n/a    |
| WW13            | 450-mm sanitary sewer on a future street from Humber Station Road to 690m easterly, north of Healey Road                       | 2032                      | Road / development driven  | n/a    |
|                 | Bolton Capacity Improvements<br>Schedule C Class EA (ROPA30)   | 2024                      | Independent/<br>Underway   | 1/3/6  |

Total Cost of Water and Wastewater Projects Included in the Current Master Plan: \$155M